




A QUALITY PRODUCT

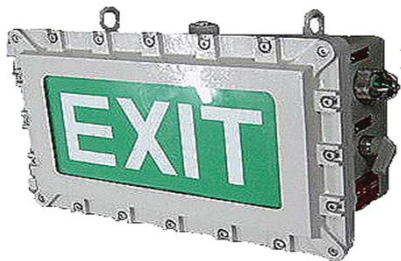

## EXIT LIGHT ,EEXT Series EXPLOSION PROOF

### TECHNICAL DATA

Type of Protection	: Ex de IIB T6
Conforming to	: Standards IEC 60079 - 0 to 1 or UL 60079-1
Marking for test	: Ex II2G
Degree of Protection	: IP 66 acc.To IEC 60529
Ambient Temp. (Ta)	: -20° C to+ 40° C or 55° C
Rated Voltage	: 220 - 240 V.AC. 50/60Hz. Output 12V.DC.
Lamp	: 1 x 10w. For Flu. , 2 x 9w. For Compact Flu.
Protection class for UL	: Class I, Division1 or 2 Group. : Class II, Division1 or 2 Groups.E,F,G
Protection class for IEC	: Zone1and Zone 2

### SPECIFICATION

Body material	: Marine Grade Copper-free aluminium alloy with polyester powder coated RAL7032 (GREY)
Lens	: Heat and impact resistant clear glass
Sing face	: White, Green acrylic with red,white colour letters.

### OPITON

For outdoor used on request.

For input supply 240 V.AC. 50 Hz.

Provided with emergency power pack,  
add suffix - E to Cat.,No.

### CATALOGUE NUMBER AND DIMENSION

Lamp Watts	Temp. Class (Surface Temp.)		Cat.,No.
	40° C Ta	55° C Ta	
Fluorescent 1 x 10 W.	T6	T6	EEXT 110F
Compact Fluorescent 2 x 9 W.	T6	T6	EEXT209C

